


JK390 series


Industrial chain stitch sewing machine

JOCKY


- JK390-1N 1 needle
- JK390-2N(P) 2 needles parallel
- JK390-2N(T) 2 needles tandem
- JK390-3N 3 needles in triangle
- JK390-3N(T) +PL 3-needles in a line add puller device

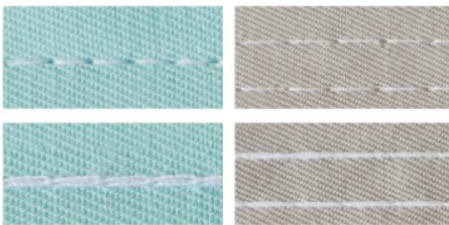

1-needle chainstitch Parallel 2-needle chainstitch

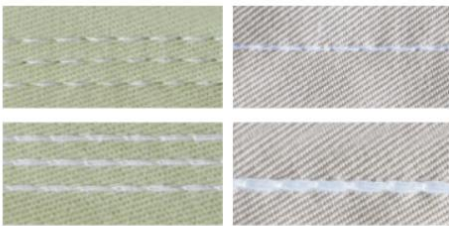

3-needle chainstitch Tandem 2-needle chainstitch

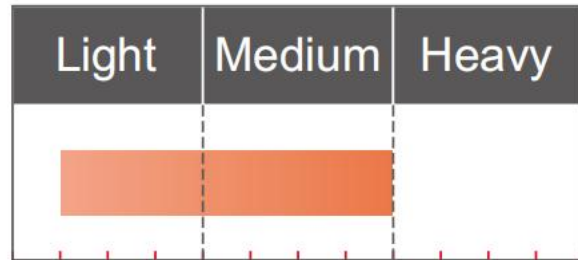

Features

- 1 / 2 / 3 needles are available
- 2-needle model with stitch in parallel or tandem forms for option
- 3-needle model with needles in a row or triangle forms for option
- All models can add puller device for better feeding
- Pullers with flat rubber, gear rubber or gear metal for option



JK390-1N




JK390-2N(P)



JK390-2N(T)



JK390-3N
3-needles in triangle



JK390-3N(T)
3-needles in a line

MORE INFORMATION

Technical Specification

Model	JK390-1N JK390-1N-PL	JK390-2N(P) JK390-2N(P)-PL JK390-2N(T) JK390-2N(T)-PL	JK390-3N JK390-3N-PL
Needle number	1	2	3
Max. speed	5,000sti/min		
Lubrication	Automatic		
Needle type	TVX7(#14)		
Max. stitch length	4mm		
Needle bar stroke	30mm		
Presser foot lift	5.5-10mm		
Bobbin thread winder	By hand: 5.5mm; By knee:10mm		
Packing size	680x245x523mm		
Weight(G.W/N.W)	40/35KGS		



Flat rubber roller



Gear rubber roller



Gear metal roller